ASKO Logic Dishwasher

D5654XXLHS

Type: Built-in
Colors: TouchProof™ stainless steel

PERFORMANCE
Capacity: 17 place settings
Noise level 46 dB(A)
9Spray™ system, PowerZone™ Pots & Pans, PowerZone™ Plate, PowerZone™ Cutlery

PROGRAMS

Time	Heavy	Normal
Daily	Quick	Super Quick
Delicate	Eco	Mixed
Rinse and Dry	Rinse & Hold	Lower Wash
Upper Wash		

Super Quick program in 15 minutes!

FEATURES
7 Temperatures, Turbo drying™, Delayed start 1-24 h, Time set, Time saver, Hidden control, LCD display, Halogen interior light, Front-adjusting rear leg for easy installation, Front LED display, Towel bar handle, Uses as little at 2.6 gals of water in Quick wash, Energy Star rated, 2 year warranty

FLEXIRACKS™
Exclusive height-adjustable upper rack accommodates:
World's only 4 rack, 3 rack, 5 basket design, 7 1/2" - 9" items, 5 rows of glasses capacity, Fold-down stemware shelves, World's most usable capacity
Exclusive lower rack accommodates:
11 3/8" -15 1/4" dishes, Fold-down tines for storage flexibility, Wide tine design for large bowls and platters, Upper & lower rack handles
Middle rack with dedicated wash system
Cutlery basket

Asko Appliances, Inc
PO BOX 940609 • Plano • Texas • 75094
Phone 800.898.1879
www.askousa.com

Art. no: 6301712

PLANNING & DESIGN: XXL DISHWASHERS

D5434XXL, D5624XXL, D5634XXLHS, D5654XXLHS, D5894XXLHS

Unit Dimensions

	US	METRIC
HEIGHT:*	34 3/8″ – 36 ½″	873 – 927 mm
WIDTH:	24″	610 mm
DEPTH:	22 7/8″	581 mm
DEPTH W/ HANDLE (HS):	24 7/8″	632 mm
DEPTH W/DOOR OPEN:	49 ½″	1257 mm
WEIGHT:	106 lbs	48 kg

Technical Data

Electricity	120 V, 60 Hz, 15 Amp
Water pressure	4.2 – 140 psi
Heating element	1200 watt
Max loading	1300 watt

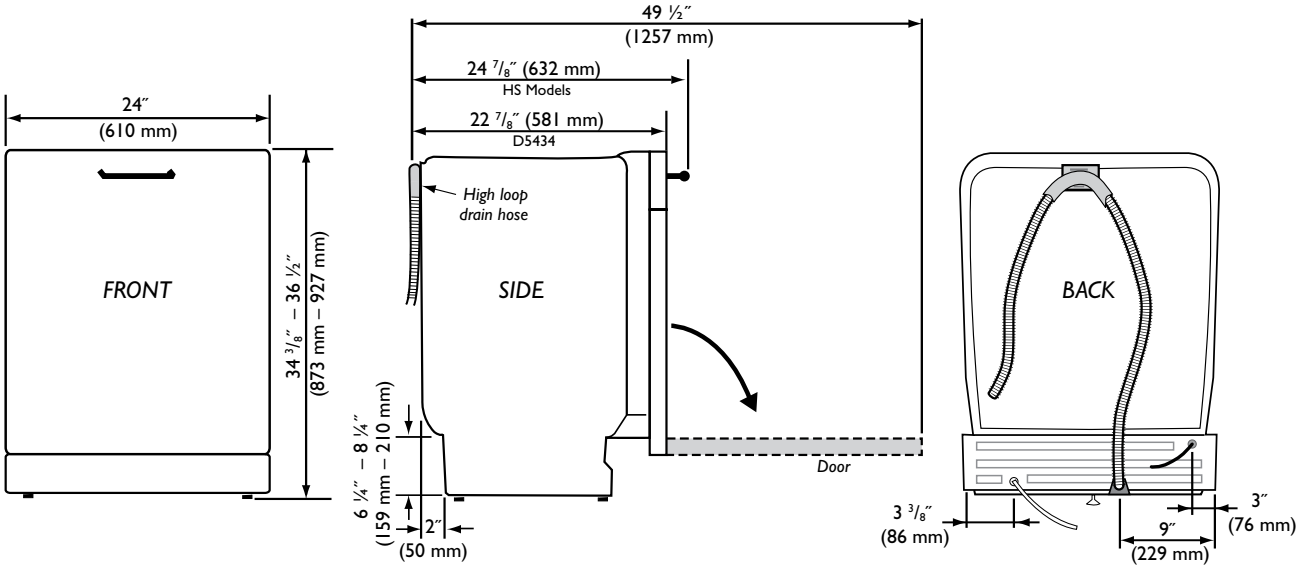

Cutout Dimensions

	US	METRIC
HEIGHT:*	34 3/8″ – 36 ½″	873 – 927 mm
WIDTH:	24″	610 mm
DEPTH:	24″	610 mm

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 1 ½″ (38 mm) in diameter.

* ***Total height can be reduced by ½″ by removing upper trim.***

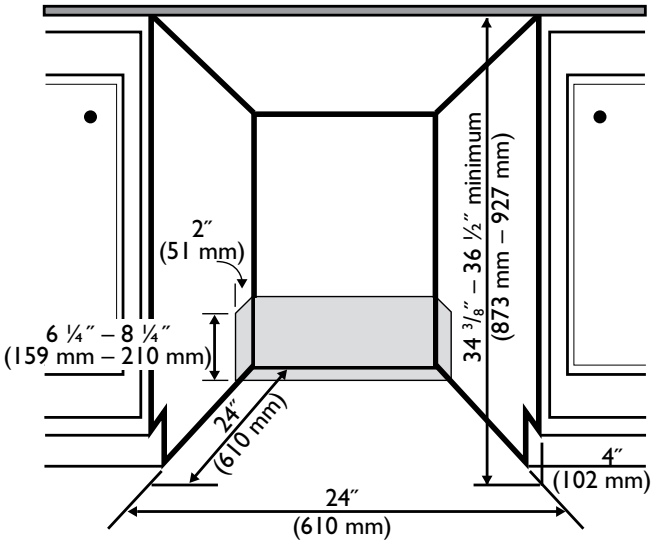

Specifications are subject to change without notice. See installation instructions for additional details.