D5152XXL (Front Panel Configuration)

 COLORS
 Black
 White
 TouchProof™ Stainless Steel

 SKUs
 D5152XXLB
 D5152XXLW
 D5152XXLS





D5152XXLW

D5152XXL Control


- Key Features (♦ Unique ASKO Features)
- Exclusive 2 Plus 1 Warranty provides up to 3 years parts and labor protection
- Unsurpassed loading flexibility up to 15 1/4" clearance in lower rack
- ♦ SuperCleaningSystem™
 - PowerZone™ Pots-and-Pans PowerZone™ Cutlery
 - 8Spray™ wash system delivers superior cleaning
 - Self-cleaning triple filtration system
- ◆ TurboFan™ Drying System
- Time Wash program: You select program time and dishwasher will choose most suitable program
- ♦ 8Steel™ System
- FlexiRacks[™]
 - Premium upper rack
 - Height adjustable upper rack
 - Up to 9" clearance in upper rack
 - Knife guard
 - Premium lower rack
 - Up to 15 1/4" clearance in lower rack
 - Fold-down tines in lower rack
 - Stemware shelves in upper rack

- AquaSafe[™] containment system helps to prevent water damage
- AquaLevel[™] Sensor
- · Five wash programs
 - Auto w/ SensiClean™ Sensor Normal I
 - Time
- Rinse & Hold

- Heavy
- Options
 - Five temperature settings up to 160° F Set time
 - 2 drying levels

- Upper / Lower wash option
- Delay start up to 9 hours
- Quiet operation 46 dB(A)
- Front control with LED
- · Sleek, easy-to-clean control panel
- Handle: Covered Grip

D5122XXL (Front Panel Configuration)



- Viscant™ nylon, graphite coated

mesh support to secure dishes


steel supports. Finer

- Grip handles: upper &

within rack.

lower racks

- Cutlery basket





D5122XXLS

D5122XXL Control

Key Features (♦ Unique ASKO Features)

- Exclusive 2 Plus 1 Warranty provides up to 3 years parts and labor protection
- Unique push-button control system
- SuperCleaningSystem™
 - PowerZone™ Pots-and-Pans PowerZone™ Cutlery
 - 7Spray™ wash system delivers superior cleaning
 - Self-cleaning triple filtration system
- TurboFan™ Drying System
- ♦ 8Steel[™] System
- FlexiRacks[™]
 - Premium upper rack
 - 9" clearance in upper rack
 - Knife guard
 - Exclusive lower rack
 - 13 3/4" clearance in lower rack
 - Fold-down tines in lower rack
 - Stemware shelves in upper rack
- Viscant™ nylon, graphite coated steel supports. Finer mesh support to secure dishes within rack.
- Grip handles: upper & lower racks
- Cutlery basket

- AquaSafe[™] containment system helps to prevent water damage
- · Four wash programs
 - Heavy
 - Normal
- QuickRinse & Hold
- Options
 - Five temperature settings up to 160° F
 - 2 drying levels
- Front control
- Quiet operation 48 dB(A)
- Handle: Covered Grip

TALL TANK MODELS

Planning & Design: XXL Dishwashers

D5122XXL, D5152XXL, D5223XXL, D5233XXLHS, D5253XXLHS, D5893XXLHS, D5883XXLHSENC

1257 mm

48 kg

52 kg


Unit Dimensions

| METRIC |
|----------------------|
| 6-1/2" 873 to 927 mm |
| 603 mm |
| 603 mm |
| 581 mm |
| n |
| |

Technical Data

| Electricity | 120 V, 60 Hz, 15 Amp |
|-----------------|----------------------|
| Water pressure | 18-176 psi |
| Heating element | 1200 watt |
| Max loading | 1300 watt |



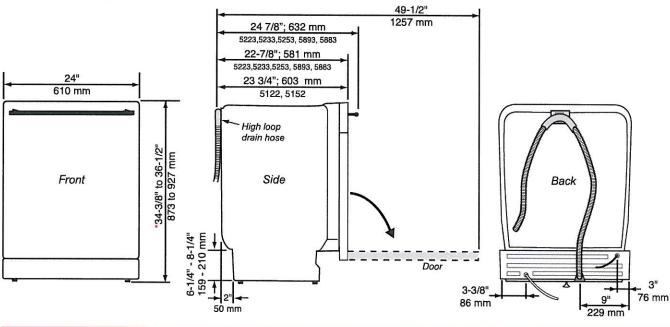

Cutout Dimensions

| | US | METRIC |
|--------|--------------------|---------------|
| HEIGHT | 34 3/8" to 36 1/2" | 873 to 927 mm |
| WIDTH | 24" | 610 mm |
| DEPTH | 24" | 610 mm |

Depth includes space for the high-loop drain hose.

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" in diameter.

* Total height can be reduced by 1/2" by removing upper trim.

